



Yamaha G16/19/20 Lift Kit Installation Instructions Part# 6253

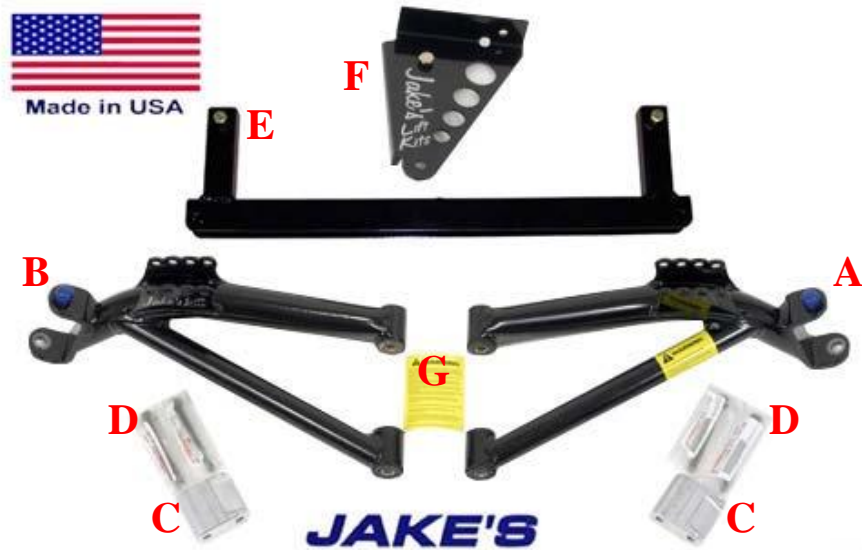


ITEM	QTY.
A. Driver Side A-Arm	1
B. Passenger Side A-Arm	1
C. Aluminum Steering Riser	2
D. Bolts for Risers 95817-10090	4
E. Rear Goalpost (Shock Extension)	1
F. Rear Sway Bar Mount	1
G. JAKES Warning Label	1



FRONT INSTALLATION


- Remove the front bumper.
- Raise the front of the cart and place it on jack stands. You will be installing larger wheels & tires so raise the cart high enough to accommodate additional height.
- Remove both the front wheels.
- Remove the cotter pins and bolts from both the left and right steering arms. Remove the steering arms. (Discard these bolts. Longer bolts are supplied in the kit for use when reinstalling the steering arms with the new aluminum riser blocks.)
- Use a drift punch to drive the split roll pins out of the spindles. Remove the king pins and clean and lubricate them for later use. Remove the spindle from the stock A-arms.
- Remove the lower shock bolts.
- Remove the cotter pins and bolts from the stock A-arms. Remove the A-arms. Save the nuts and bolts for installing JAKES new A-arms.
- Install JAKES new A-arms (Items A&B). Do not tighten at this time.
- Install the lower bolt of the shock to the 3rd hole from the spindle end of the A-arm. Do not tighten at this time.
- Clean and lubricate the spindles. Install the spindles on JAKES new A-arms using the kingpins and the split roll pins that were removed in step 5. Make sure the thrust washer is on the top end of the spindle.

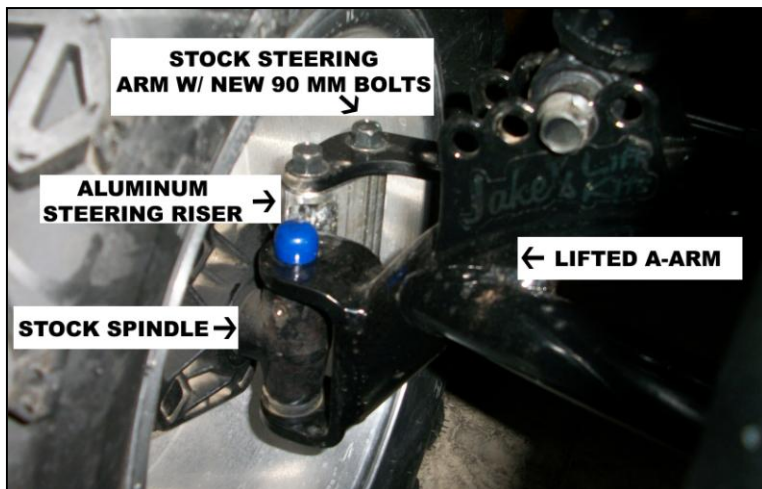

11. Install both steering arms along with JAKES new aluminum riser blocks (Item C). Use the longer bolts (Item D) provided in the kit. Make sure the machined slot in the riser blocks faces forward and inward to provide clearance.
12. Securely tighten all bolts. Install the new cotter pins in the A-arm bolts.
13. Install JAKES recommended wheel and tire size (22 x 11 x 10 tire and 10" rim with 3 x 5 offset) for maximum performance and stability. **NOTE: Your stock wheels and tires will NOT work!**
14. Take the cart off of the jack stands and lower the cart.
15. Adjust toe-in to approximately 1/8" in after rear lift is complete. Toe must be visually looked at while one person is driving the cart sitting in the center of the seat driving 15-20 feet toward mechanic. Adjust the toe according to what was seen. Repeat procedure after adjustments are made to re-check toe-in.
16. Install the front bumper.


REAR INSTALLATION

1. Remove the rear body assembly if necessary. (Not all bodies will require removing.)
2. Remove the rear sway bar at the frame end. (Driver's side)
3. Raise the rear of the cart and place the frame on jack stands. (Make sure you raise cart high enough for larger tires.)
4. Remove the rear tires.
5. Remove the rear shocks.
6. Install JAKES rear goalpost (Item E) to the **top stock shock mounts** as shown in the illustration using the provided nuts and bolts. **NOTE: The goalpost has a "J" in the middle of the cross bar. The "J" should be facing the rear of the cart.**

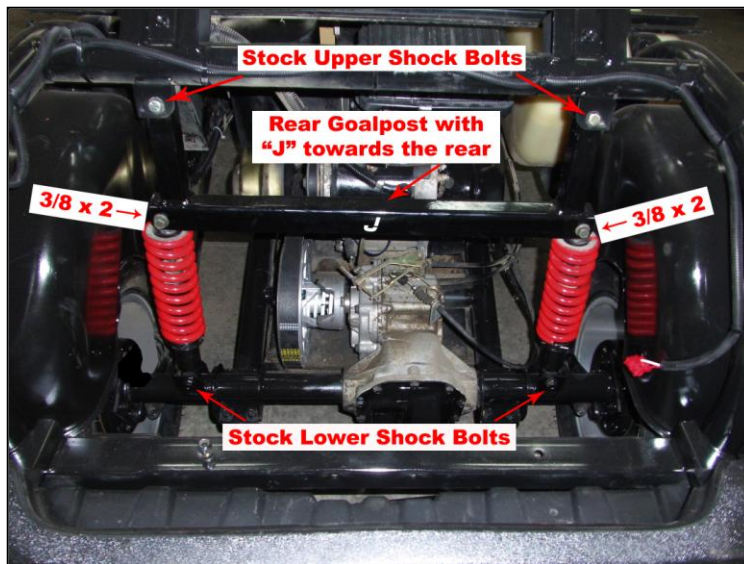

7. Install the shock to the goalpost using the stock hardware (You may have to oversize the lower shock mount holes enough to eliminate shock bind.) **NOTE: The stock Yamaha coils are very soft. We recommend upgrading your stock springs with Jake's heavy-duty springs Part# 6280 especially if you have a rear seat or box on the cart.**

8. Install JAKES new sway bar bracket (Item F) to the driver's side of the cart and reconnect the sway bar. (Some carts may require enlarging the left rear bag-well hole down through the frame with a 3/8" drill bit to secure the sway bar.)
9. Securely tighten all bolts.
10. Install your new wheels and tires and lower cart to the floor. **NOTE: Your stock wheels and tires will NOT work!**
11. Install the rear body assembly if needed.
12. Make sure you have enough length for the choke cable, ground wires, vacuum lines, fuel lines and the electrical wire. (The choke in some cases, may need lowered in the body 1 - 2" and remounted for adequate length.)
13. Included is a warning label (Item G) which is to be placed on the steering column or another visible area and is to be read by all operators.

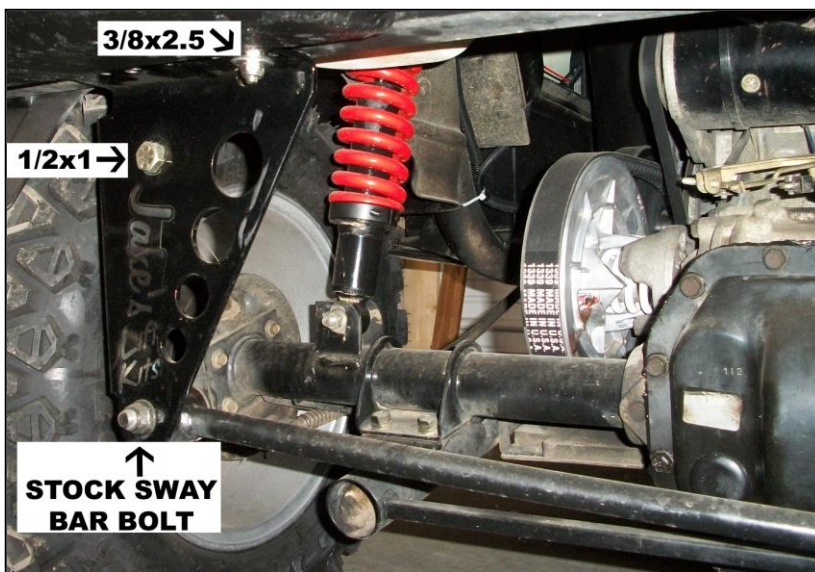

14. Double check all of the bolts for tightness.

NOTE: Some models may need the inner fenders heated, reformed or cut for tire clearance.

Indemnification And Insurance Agreement

High Performance Enhancement Kit purchaser assumes sole and entire responsibility for, and shall indemnify and save harmless Nivel LLC, from any and all claim, liability, responsibility, and persons or property that may be sustained in connection with the use of any product before or after purchase, including but not limited to high performance enhancement lift kits. The High Performance Enhancement Kit purchaser also shall indemnify Nivel LLC harmless with respect to any and all liability that may be incurred.

Golf Cars are recommended for use only by those aged 16 and older. Golf Cars can be especially hazardous to operate. Always remember that riding and alcohol/drugs don't mix. Never ride on public roads. Never carry more than two passengers (except shuttles and trams). Never engage in stunt driving. Avoid excessive speeds and be particularly careful on difficult terrain. Nivel LLC reserves the right, at any time, to discontinue or change specifications, prices, designs, features, models, or equipment without notice and without incurring any obligation.



866-405-2537

www.jakesliftkits.com

© Copyright Nivel LLC
All Rights Reserved